




VACUPRESS FLEX 912934

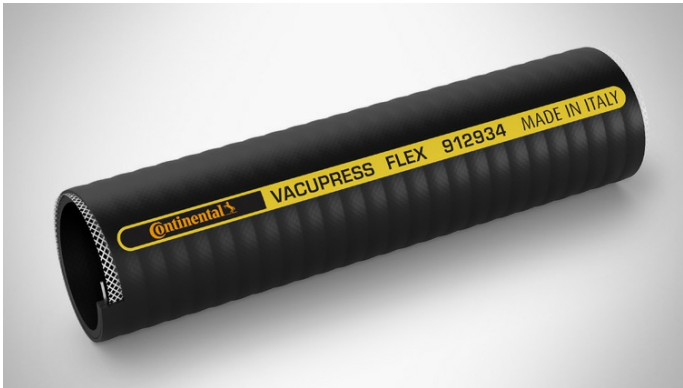

Multilayer PVC hose with embedded galvanised steel spiral with polyester yarn reinforcement, for suction and delivery of liquids and solids.

DETAILS

 SMOOTH SURFACE *****

 FLEXIBILITY ****

 TEMPERATURE RANGE -25 °C 60 °C

 CHEMICAL RESISTANCE PVC Table

 CRUSHING RESISTANCE ***

 ANTI UV 3

Ø nominal mm	Ø nominal inch	Ø i.d. mm	Ø o.d. mm	vacuum 23 °C m/H ₂ O	working press. at 23 °C r.1:3 bar	working press. at 23 °C r.1:4 bar	bursting press. at 23 °C bar	bending radius mm	total thickness mm	Ø steel wire mm	spiral pitch mm	spiral direction	weight meter g/m	Segment Length m	coil length m	Availability
19	3/4	19	28	9	20	16	60	70	4.5	1	8.5	right	475		60	On demand
25	1	25	36	9	16	12	48	80	5.5	1.2	9	right	680		60	On demand
30		30	40.5	9	16	12	48	90	5.3	1.2	9.5	right	770		60	On demand
32	1 1/4	32	42.5	9	16	12	48	100	5.3	1.2	9.5	right	800		60	On demand
35		35	47	9	14	10	42	115	6	1.4	10	right	1100		60	On demand
38	1 1/2	38	51	9	14	10	42	125	6.5	1.4	10.5	right	1200		30	On demand
40		40	52	9	14	10	42	130	6	1.4	11	right	1200		30	In stock
45	1 3/4	45	58	9	12	10	36	140	6.5	1.4	11	right	1400		30	On demand
50	2	50	63.5	9	12	10	36	150	6.8	1.6	11	right	1600		30	In stock
60		60	74	9	12	10	36	180	7	1.6	11	right	2000		30	In stock
63	2 1/2	63	77	9	12	10	36	190	7	1.6	11	right	2100		30	In stock
75		75	91	9	12	10	36	190	8	2	13.5	right	2950		30	On demand
76	3	76	92	9	12	9	36	210	8	2	13.5	right	2970		30	In stock
80		80	96	9	10	8	30	220	8	2	14	right	3020		30	In stock
90	3 1/2	90	106.5	9	10	8	30	250	8.3	2	14	right	3500		30	In stock
100		100	117	9	10	8	30	300	8.5	2	14.5	right	4050		30	In stock
102	4	102	119	9	10	8	30	300	8.5	2	14.5	right	4150		30	In stock
120		120	138	9	8	6	24	350	9	2.5	15	right	5430		20	In stock
127	5	127	145	9	7	5	22	370	9	2.5	15	right	5950		20	In stock
150		150	169	9	5	3	15	480	9.5	2.5	15.5	right	7000		20	On demand
152	6	152	171	9	5	3	15	480	9.5	2.5	15.5	right	7050		20	In stock
200		200.5	222	9	3	2.5	9	650	10.7	3	22	right	10300	12		On demand
203 (**)	8	203.2	225	9	3	2.5	9	650	10.9	3	17.5	right	11000	12		On demand

All technical specifications apply to a temperature of 23° C ± 2° C (ISO 291)

All technical specifications contained herein are provided for reference purposes only.

For further details regarding our products' specifications, please refer to the relevant products' data sheets or contact your sales representative.