


// HYDROCARBONS

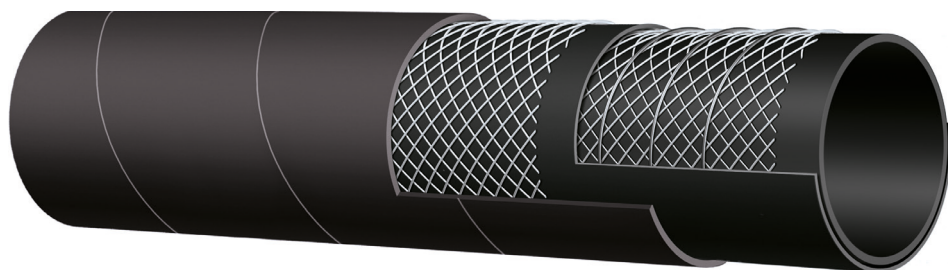

// ALFACLEAN OIL 6C3AA

Fuel-oil S&D 10 bar (150 psi) - Extra flexible

Tube: black conductive NBR.

Reinforcement: high tensile textile cords with embedded steel helix wire.

Cover: black conductive NBR/PVC – abrasion, ozone and hydrocarbon resistant.

Application: fuel and oil suction and delivery with up to 50% aromatic content.

Special construction for maximum flexibility.

Temperature: -30 °C +100 °C (-22 °F +212 °F)

SAP	ID (mm)	OD (mm)	WP (bar)	BP (bar)	BR (mm)	Vacuum %	Weight (kg/m)	Length (m)
2017612	51,0	61,0	10	30	102	100,00	1,390	61,000
2017508	76,0	87,0	10	30	152	90,00	2,340	61,000
2016764	102,0	113,0	10	30	204	90,00	3,090	61,000
2017510	152,0	168,0	10	30	304	80,00	6,680	61,000